



AMENDMENT NO. 1

The following amendments are hereby incorporated into the contract documents for the below stated project:

**SERVICE AGREEMENT NO. 061212
WEATHERIZATION JOB ON. 308-11-03**


RODRIGUEZ CONSTRUCTIONS INC

Effective June 20, 2012, Gila County and Rodriguez Constructions Inc entered into a contract whereby the Contractor agreed to provide construction services for Weatherization Job No. 308-11-03 in the amount of \$39,000.

Amendment No. 1 to the agreement reflects the change to the engineering specifications due to ground compaction problems. See attached "Exhibit A" made a binding part of this agreement as set forth herein. The cost of the amendment will be \$15,000.

All other terms and conditions of the original agreement shall remain the same during the term of the contract.


GILA COUNTY

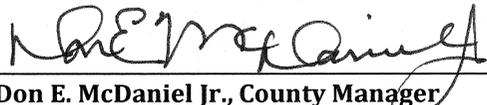

Don E. McDaniel Jr., County Manager

Date: 8/1/12

CONTRACTOR

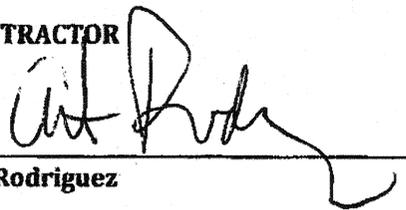

Art Rodriguez

Date: 7-30-12

EXHIBIT "A"

David Fletcher
Director



Jendean Sartain
Deputy Director

Judy Smith
Divisional Program Manager

GILA COUNTY OFFICE OF COMMUNITY SERVICES
"Improving the quality of life for all residents"

HOUSING REHABILITATION

CHANGE ORDER

CONTRACT 061212

Date: 7/30/2012

Client: Roy Goodwin Contractor: Rodriguez Construction
Address: 149 Reno Drive Tonto Basin Az. 85553 Job No: 308-11-03

The following change(s) is/are authorized in the above identified Housing Rehabilitation Contract:

Item	Description of Change	Cost
Foundation	Change on engineered specifications due too ground compaction problems. Could not dig for footers and pour piers dirt caved in to sandy had to remove a 28x60 4ft deep pad of dirt. Form and pour for post then, pour a 12 inch pad then bring AB dirt to bring back to ground level and compact to specs. Before we could continue with scope of work. Also had to dispose of the dirt were having to remove.	\$15,000.00

Roy Goodwin
Homeowner Signature

7/30/12
Date

[Signature]
Contractor Signature

7-30-12
Date

Salvador E. Eglecio
Rehab. Specialist Signature

7-30-12
Date

Community Action Program
Gila Employment and Special Training
Housing Rehabilitation Program

Section Eight Housing Assistance
Re-Employment and Pre-Layoff Assistance Center
Workforce Investment Department



5515 S. Apache St., Suite 200
P.O. Box 1254, Globe, AZ 85502
(928) 425-7631



#P1009-047
Goodwin M/H

June 25, 2012


Proposed plan change to footings for Goodwin M/H

Due to sandy soil and collapsing excavation, the contractor requests the following change in the foundation:

1. Instead of excavating for each individual pier, he will excavate a 24' x 60' "hole" 48 inches deep
2. He will form and pour a concrete "strip footing" on top of the bottom of the "hole" and under each row of piers. The strip footing will be a minimum of 24" wide by 12" thick with rebar sticking out horizontally to tie the strip footing to the areas that will be slurried between the strip footings. Footing reinforcement will be located and constructed as per the approved plans
3. Strip footings will contain 3 continuous horizontal rebar as per the alternate ribbon footing detail on the approved plans
4. "Voids" between strip footings will be filled with 1 sack slurry to the top of the strip footings, 12" deep minimum.
5. The rest of the "hole" will be filled with soil and/or AB in compacted lifts. Compaction test results will be provided for locations and depths as specified by the County and/or Inspector

The change described above was approved on 7/25/12 by Lloyd Rogers, the engineer of record.


The change described above was approved on 7/25/12 by Darde DeRoulhac, Floodplain Engineer pending receipt of a diagram to be submitted by the contractor for clarification.



Joe Mendoza
Gila County Community Development

Art Rodriguez, Contractor


928-701-1578

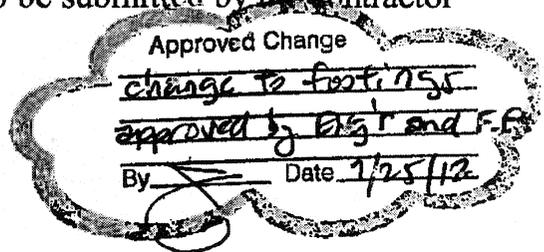

I-CODES
APPROVED FIELD COPY
GILA COUNTY COMMUNITY DEVELOPMENT
PERMIT #: P1009-047
DATE: 7/25/12 BY: 

ALL MARGINS LIKE FOOTERS
 TO BE 24" X 24" X 12" DEEP
 W/ 2-#4 BARS VERTICAL

ALL FOOT CONTINUOUS FOOTERS
 TO BE 24" X 24" X 12" DEEP

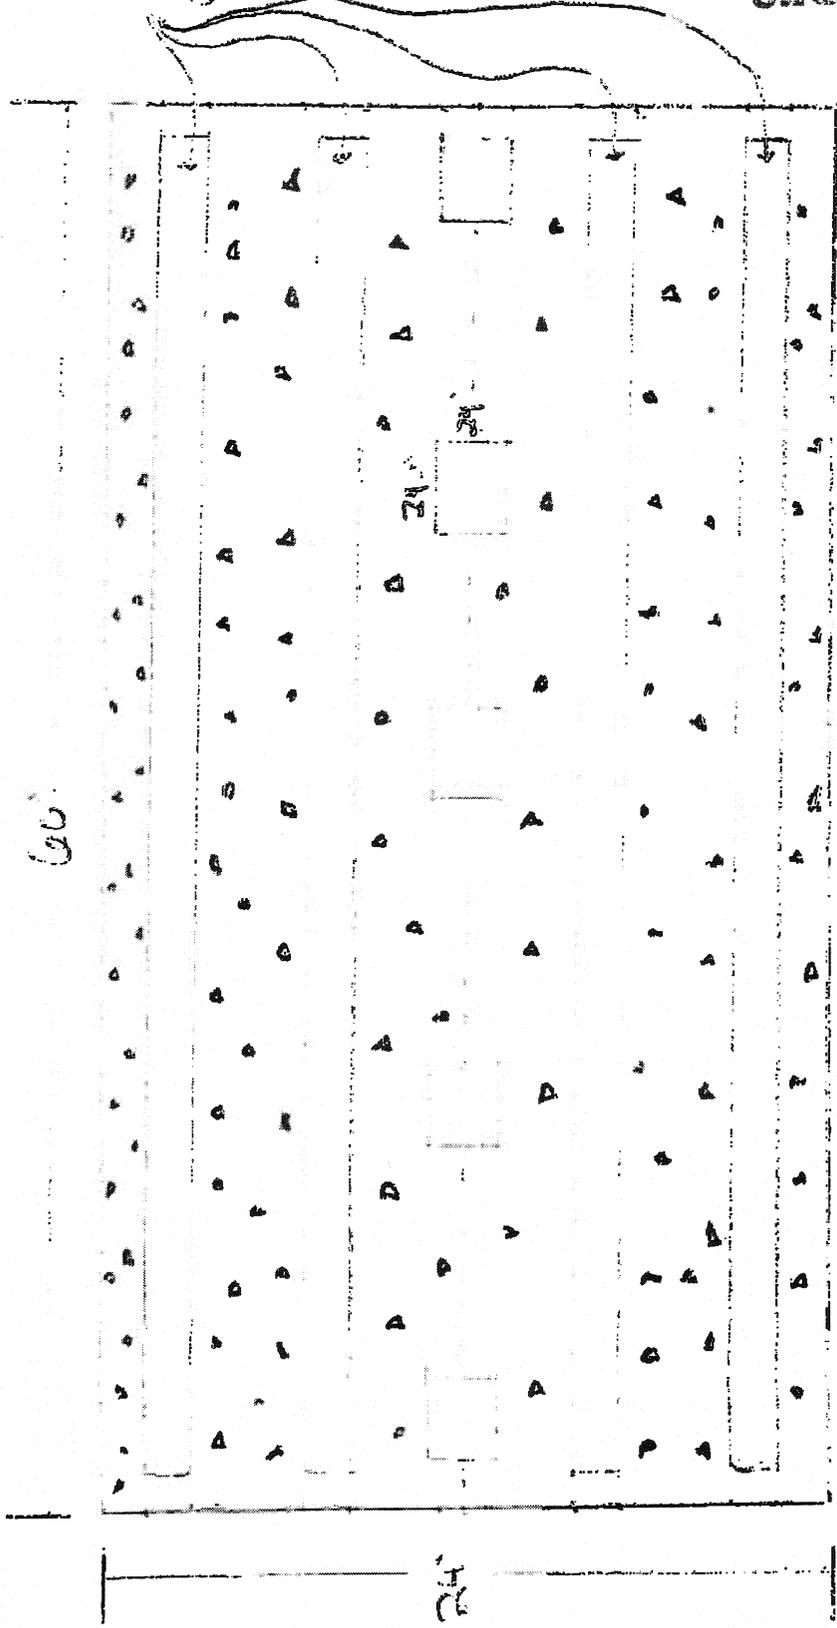

3-#4 BARS
 CONCRETE
 FOOTER
 ALL FOOTERS
 12" DEEP W/
 2-#4 BARS
 CONCRETE

I-CODES


Roy & Rosaline Goodwin
 149 W. Reno Dr.
 TONTO BASIN
 # 201-14-018C

ALL APGAS OUTSIDE FOOTERS WITH
 REINFORCING 12" OF CONCRETE SURROUND
 THROUGH OUT ENTIRE PAD (60' X 24')


APPROVED FIELD COPY
 GILA COUNTY COMMUNITY DEVELOPMENT
 PERMIT #: P 1009-047
 DATE: 7/25/12 BY: [Signature]

Roy & Rosaline Goodwin
149 W. Reno DR,
Tomb Basin

201-14-018C

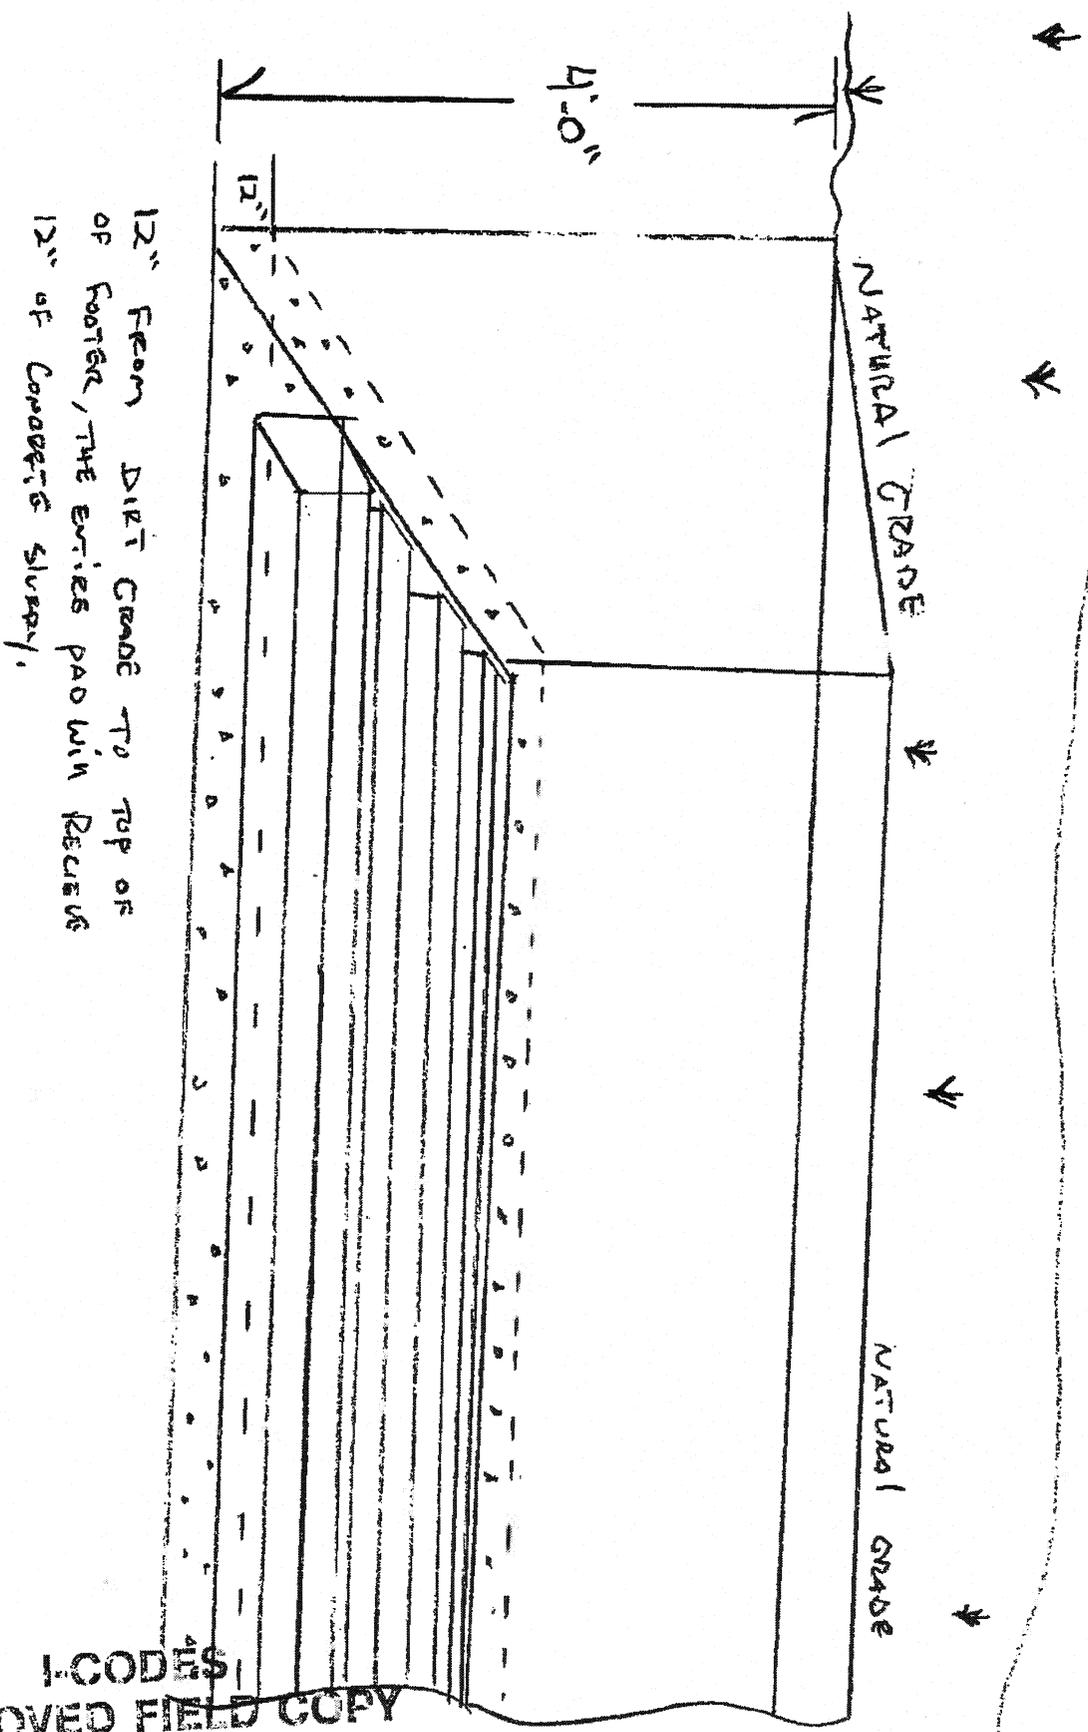

12" FROM DIRT GRADE TO TOP OF
OF FOOTING, THE ENTIRE PAD WITH REINFORCE
12" OF CONCRETE SLURRY.

I-CODES
APPROVED FIELD COPY
GILA COUNTY COMMUNITY DEVELOPMENT
PERMIT #: 21009-047
DATE: 7/25/12 BY: 



Estimate

P. O. Box 13
Miami, AZ 85539
928-425-7244
928-425-5337

RES/COMM. LIC. #
ROC247373K42
RES. #ROC247371B
COMM. # ROC247372 B-01
rodriguezconst@hotmail.com

7/30/2012	149
-----------	-----

Gila County Housing
5515 South Apache Avenue
P. O. Box 1254
Globe, AZ 85502
Attn: Valrie

Ship To
CHANGE ORDER FOR CDBG-
308-11-03
PO # 2012-00000826

Rodriguez Constructions Inc. hereby proposes to submit an estimate to preform the following work:

Goodwin, Roy

Description	Qty	Cost	Total
<p>CHANGE ORDER # 1 After commencing footer excavation it became apparent that the engineer's drawings would not be feasible due to the soil conditions. It was discovered that it is necessary that we excavate residential pad, 60' L X 24' W x 48" D. Engineers approved at this point that we build continuous footers (24" x 12") with re-bar reinforcement (260 LF) with 3-#4 re-bar. In addition the engineers are demanding that we pour 12" thick of concrete slurry throughout the entire pad base (60' x 24' X 12" Deep) We will bring in compactible soil in 12" intervals and back fill and compact a total of 36" of soil fill. All spoils already removed (350 tons) will be removed from the property.</p>		15,000.00	15,000.00

Thank you for your business.

\$15,000.00

If you are interested in accepting this bid, please sign and return with any deposit required.
Thank you

Signature of acceptance of above proposal:

Salvador E. Eyzaguirre

Respectfully Submitted,
Art I. Rodriguez