


ORIENTATION PLAN

SCALE - 1/16"=1'-0"

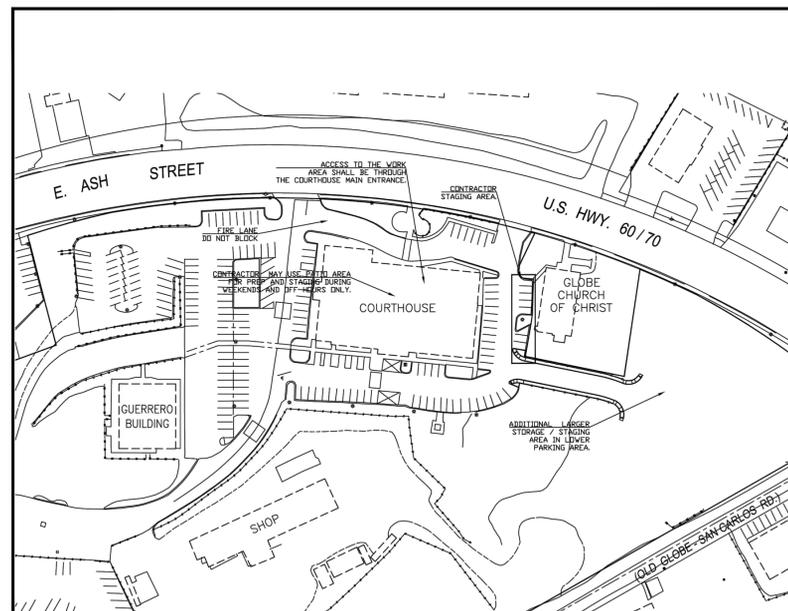

COURTHOUSE SITE PLAN

NOT TO SCALE

**GILA COUNTY COURTHOUSE
SECOND FLOOR REMODEL
SCHOOLS AND ASSESSOR**

ADDRESS:
1400 E. ASH STREET
GLOBE, AZ 85501

CONTACT PERSON:
ROBERT HICKMAN (928) 402-8591

PARCEL NUMBER: 205-14-027D

PROJECT DATA:
OCCUPANCY TYPE: B OFFICES
CONSTRUCTION TYPE: VA (WITH FIRE SPRINKLER SYSTEM)

SCOPE OF WORK:
RENOVATION OF INTERIOR ONLY OF EXISTING STRUCTURE,
APPROXIMATELY 3,929 SQ.FT. OFFICES AND RESTROOMS.

WORK SHALL INCLUDE WALL FRAMING AND FINISHING, GYP. BD., PAINTING, FLOORING, TILE, CEILING SYSTEMS, CAULKING, MECHANICAL, PLUMBING, ELECTRICAL, FIRE SPRINKLER AND OTHER ASSOCIATED WORK AS IDENTIFIED IN THE DRAWINGS AND AS SPECIFIED IN THE TECHNICAL STANDARDS FOR THIS PROJECT.

FIRE SPRINKLER MODIFICATIONS WILL BE NECESSARY. CONTRACTOR IS TO PROVIDE ENGINEERED FIRE SPRINKLER DRAWINGS, WITH MODIFICATIONS TO BE MADE, AND STATE FIRE MARSHAL APPROVAL OF SUCH DESIGN, TO GILA COUNTY FOR REVIEW AND APPROVAL, PRIOR TO DOING SUCH WORK.

NEW MECHANICAL SYSTEM DUCTWORK TO AND FROM EXISTING SYSTEMS IS REQUIRED. SEE TECHNICAL STANDARDS, SUBMITTAL REQUIREMENTS AND MECHANICAL SECTIONS.

ALLOWANCES AS IDENTIFIED IN THE BIDDING DOCUMENTS.

ROOM FINISH SCHEDULE

SEE TECHNICAL STANDARDS FOR SPECIFIC PRODUCT TYPE, STYLE AND MODEL. COLOR SAMPLE SUBMITTAL REQUIRED.

ROOM #	ROOM NAME	WALLS				FLOOR	BASE	CEILING	CLG HT.
		NORTH	SOUTH	EAST	WEST				
200	ASSESSOR (PUBLIC SIDE)	STOREFRONT	MILLWORK	GYP/PAINT	MILLWORK	TILE	VINYL	ACOUSTICAL TILE/LAY-IN GRID	9'
201	ASSESSOR (EMPLOYEE SIDE)	MILLWORK	EXISTING	OPEN/EXIST.	GYP/PAINT	TILE / CARPET	VINYL	ACOUSTICAL TILE/LAY-IN GRID	9'
202	COPY ROOM	GYP/PAINT	GYP/PAINT	GYP/PAINT	GYP/PAINT	CARPET	VINYL	ACOUSTICAL TILE/LAY-IN GRID	9'
203	BREAK ROOM	GYP/PAINT	GYP/PAINT	GYP/PAINT	GYP/PAINT	CARPET	VINYL	ACOUSTICAL TILE/LAY-IN GRID	9'
204	OFFICE	GYP/PAINT	GYP/PAINT	GYP/PAINT	GYP/PAINT	CARPET	VINYL	ACOUSTICAL TILE/LAY-IN GRID	9'
205	SUPERINTENDANT'S OFFICE	GYP/PAINT	GYP/PAINT	GYP/PAINT	GYP/PAINT	CARPET	VINYL	ACOUSTICAL TILE/LAY-IN GRID	9'
206	CONFERENCE ROOM	GYP/PAINT	GYP/PAINT	GYP/PAINT	GYP/PAINT	CARPET	VINYL	ACOUSTICAL TILE/LAY-IN GRID	9'
207	STORAGE / FILE AREA	GYP/PAINT	GYP/PAINT	GYP/PAINT	GYP/PAINT	CARPET	VINYL	ACOUSTICAL TILE/LAY-IN GRID	9'
208	OPEN OFFICE / HALLWAY	GYP/PAINT	GYP/PAINT	GYP/PAINT	GYP/PAINT	CARPET	VINYL	ACOUSTICAL TILE/LAY-IN GRID	9'
209	OPEN OFFICE (RECEPTION)	GYP/PAINT	GYP/PAINT	GYP/PAINT	GYP/PAINT	CARPET	VINYL	ACOUSTICAL TILE/LAY-IN GRID	9'
210	WAITING AREA	STOREFRONT	MILLWORK	GYP/PAINT	GYP/PAINT	TILE	VINYL	ACOUSTICAL TILE/LAY-IN GRID	9'
211	WOMENS RESTROOM	TILE TO 4' HT.	TILE TO 4' HT.	TILE TO 4' HT.	TILE TO 4' HT.	TILE	TILE	ACOUSTICAL TILE/LAY-IN GRID	9'
		GYP/PAINT ABOVE	GYP/PAINT ABOVE	GYP/PAINT ABOVE	GYP/PAINT ABOVE				
		TILE TO 4' HT.	TILE TO 4' HT.	TILE TO 4' HT.	TILE TO 4' HT.				
212	MENS RESTROOM	GYP/PAINT ABOVE	GYP/PAINT ABOVE	GYP/PAINT ABOVE	GYP/PAINT ABOVE	TILE	TILE	ACOUSTICAL TILE/LAY-IN GRID	9'
		TILE TO 4' HT.	TILE TO 4' HT.	TILE TO 4' HT.	TILE TO 4' HT.				
	EXISTING MAIN HALLWAY	REPAIR / PATCH / REPLACE EXISTING @ NEW WALL / STOREFRONT LOCATION.							

GILA COUNTY
PUBLIC WORKS DEPT
GLOBE, AZ



COURTHOUSE 2ND FLR
SCHOOLS & ASSESSOR

REVISED: 3/4/14

A1